

ECO-Friendly high precision surface grinder MSG-ECO Series



MSG-200H1-ECO
MSG-200HMD-ECO
MSG-250H1-ECO
MSG-250HMD-ECO

Hydraulic-less mechanism for the longitudinal drive

Using servo motor drive for longitudinal feed, Achieving 63% reduction in power consumption. "The ECO series machine does not use a hydraulic system." Heating expansion of cast iron is and accuracy is minimized stable.


Other effects

Hydraulic Oil fee

CO2 Reduction amount **912kg · kwh Reduction**


Table minimum stroke **30mm**

Power consumption (kwh)

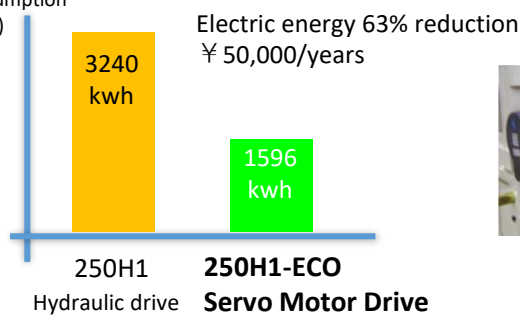

Servo Motor drive for longitudinal feed

Sample of grinding



Six-sided Tooling Die Parts



Cylindrical Parts



Fine Pitch Connector Core Pin


Optional Accessories



Magnescale Digital Readout
Part No. DRO&DROI



Chuck Control
Part No. SMART1B



13GAL Stainless Steel Coolant Tank w/ Paper
Part No. MSTP-50



Over The Wheel Dresser for 8" Wheel
Part No. OTW8



Dust Scoop Assy
Part No. DS



8" Wheel Guard with built-in Dust Scoop
Part No. WGSP8IPO



Optidress
Part No. OPTIDRESS

Specification		MSG-200H1-ECO	MSG-250H1-ECO	MSG-200HMD-ECO	MSG-250HMD-ECO
Capacity	Table Work Surface	6×13-1/2"	8×19"	6 × 13-1/2"	8×19"
Table(C/F)	Movement per Rev. of Hand Wheel	0.1"	0.1"	0.1"	0.1"
	Fine Feed Attachment(OP)	0.00005"	0.00005"	OP	OP
Head	Movement per Rev. of Hand Wheel	0.05"	0.05"	0.05"	0.05"
	Fine Feed Attachment (OP)	0.00001"	0.00001"	OP	OP
Wheel	Size	8"×3/4"×1-1/4"	8"×3/4"×1-1/4"	8" × 3/4" × 1-1/4"	8" × 3/4" × 1-1/4"
	Spindle speed (50Hz/60Hz)	2,900/3,460rpm	2,900/3,460rpm	2,900/3,460rpm	2,900/3,460rpm
Motor	Spindle	1.0kw/2P V3	1.0kw/2P V3	1.0kw/2P V3	1.0kw/2P V3
Power	Power Supply	2KVA	2KVA	5KVA	5KVA
Floor Space	Width × Length × Height	58×46×71"	75×51×71"	90"×53×69"	73×51×69"
Gross Weight		1870lbs	2350lbs	2200lbs	2750lbs



<https://www.mht-us.com> (USA)

<https://www.mitsui-high-tec.com> (Japan)

64 W. Seegers Road
Arlington Heights, IL 60005

Tel:(847)593-1634

Fax:(847)593-5760